



# KBRV Rotacione kombinovane brizgaljke unapred

Brizgaljka KBRV ima 2 poluradijalne mlaznice koje prskaju pod uglom od 45°. Zbog toga, ova brizgaljka mora ili biti opremljena dodatnom mlaznicom ili montirana na koplju. Prednje mlaznice dezintegrišu skoro svaki otpad i peru prljavštine ispred brizgaljke

## Primene





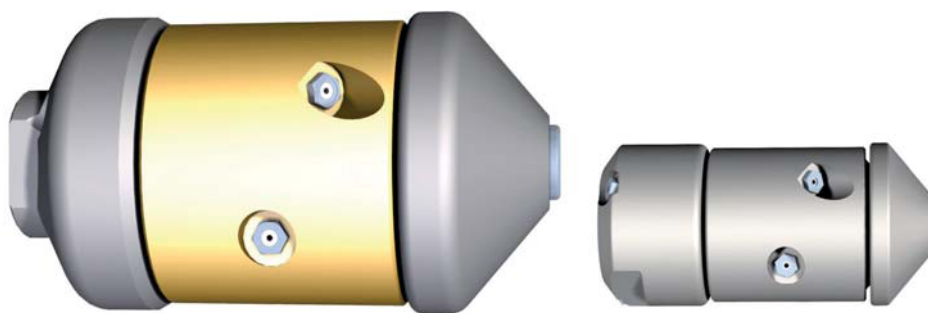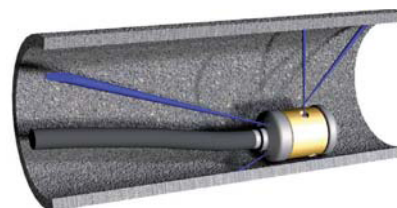






















- Uklanjanje plastičnog otpada
- Čišćenje grejača
- Čišćenje masnog otpada
- Ispiranje cevi od kuće do glavnih cevi










Radni pritisak do 250 bar



## KBRV Rotacione kombinovane brizgaljke unapred

KBRV Rotacione kombinovane brizgaljke unapred M7, M8, 1/8" - 3/4"

					
	04.011AV	04.011BV	04.012V	04.016AV	04.016BV
	M7	M8	1/8	1/8	1/4
	12 - 30	12 - 30	13 - 30	18 - 60	
	10			10	
	90°/ 2 × 0.85 45°/ 2 × 0.90			4 × 0.70 - 1.10	
	—			—	
	*			*	
	11 × 31	11 × 31	12 × 31	16 × 33	
	17			30	
	—			—	
					
	04.028AV	04.040AV	04.050AV	04.050BV	
	1/4	1/2	1/2	3/4	
	30 - 100	70 - 150	100 - 200		
	20	30	70		
	4 × M4	4 × M6	4 × M6		
	3 × M4	3 × M6	3 × M6		
	*	*	*		
	28 × 56	40 × 80	50 × 99		
	200	550	1100		
	—	—	—		

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar		Measures [mm]		
	Rotating nozzles		Weight [g]		

High Performance Tool 

# KBRV Rotacione kombinovane brizgaljke unapred

KBRV Rotacione kombinovane brizgaljke unapred 1" - 1 1/4"



	04.060V	04.100AV	04.100BV
	1	1	1 1/4
	100 - 300	200 - 600	
	100	200	
	4 × M8	4 × M10	
	3 × M8	3 × M10	
	*	*	
	60 × 111	100 × 180	
	1.60	7.40	
	—	—	

High Performance Tool

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar		Measures [mm]		
	Rotating nozzles		Weight [kg]		