

KBR Rotaciona kombinacija brizgaljki



Ova ena zlatna kombinacija brizgaljki je odlična za ispiranje cevi kao i za susedne brizgaljke iz bilo kog ugla. Zahtevaju pumpu veoma malog kapaciteta i koriste 2 radijalne mlaznice na 90° od zida cevi i 2 polu radijalne mlaznice u suprotnom pravcu pod uglom od 45°.

Kombinacija omogućava istovremeno ispiranje unapred i uklanjanje otpada.

Primene

- Uklanjanje organskog otpada
- Čišćenje grejalica
- Čišćenje masnog otpada

Radni pritisak do 250 bar

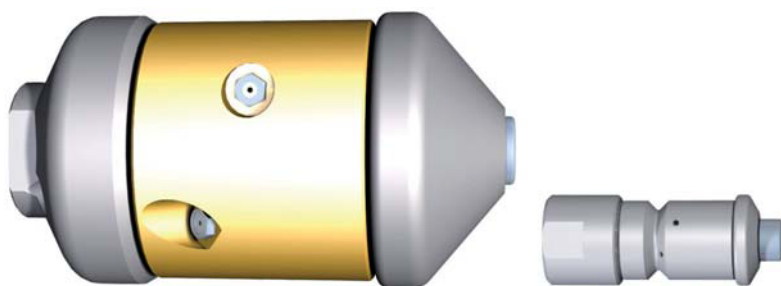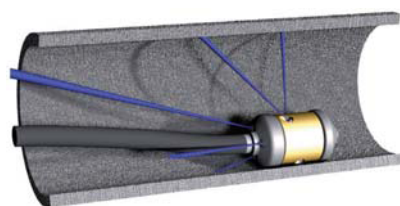

KBR Rotaciona kombinacija brizgaljki

KBR Rotaciona kombinacija brizgaljki M7, M8, 1/8" - 3/4"



	04.011A	04.011B	04.012	04.016A	04.016B
	M7	M8	1/8	1/8	1/4
	12 - 30			18 - 60	
	10			10	
	90°/ 2 × 0.85 45°/ 2 × 0.90			4 × 0.70 - 1.10	
	—			—	
	*			*	
	11 × 31	11 × 31	12 × 31	16 × 33	
	17			30	
	—			—	



	04.028A	04.028B	04.028AS	04.040A	04.040B
	1/4	3/8	1/4	1/2	3/4
	30 - 100		30 - 100	70 - 150	
	10		10	20	
	4 × M4		4 × M4	4 × M6	
	—		3 × M4	—	
	*		*	*	
	28 × 56		28 × 56	40 × 80	
	200		200	550	
	—		—	—	

High Performance Tool **enz golden jet®**

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar		Measures [mm]		
	Rotating nozzles		Weight [g]		

KBR Rotaciona kombinacija brizgaljki



	04.040AS	04.050A	04.050B	04.050AS	04.050BS
	1/2	1/2	3/4	1/2	3/4
	70 - 150	100 - 200		100 - 200	
	20	70		70	
	4 × M6	4 × M6		4 × M6	
	3 × M6	—		3 × M6	
	*	*		*	
	40 × 80	50 × 99		50 × 99	
	550	1100		1100	
	—	—		—	

KBR Rotaciona kombinacija brizgaljki 1" - 1 1/4"



	04.060	04.100A	04.100B
	1	1	1 1/4
	100 - 300	200 - 600	
	80	200	
	4 × M8	4 × M10	
	3 × M8	3 × M10	
	*	*	
	60 × 111	100 × 180	
	1600	7400	
	—	—	

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar		Measures [mm]		
	Rotating nozzles		Weight [g]		